

1 Chinook Pl, Hornby.
Christchurch, New Zealand.

(To Order: Please tick boxes and supply information and or measurements where required).

CONTACT DETAILS

Client Name: _____

Client Address: _____

Delivery Address: _____

Email: _____

Phone Number: _____ Grading: _____

Height: _____ Weight: _____

Shoes Size: _____ Disability: _____

Therapist Details: _____

UPHOLSTERY OPTIONS

Back: *Fixed Back* *Tension Adjustable*

Skirt Guards: *Fabric Skirt Guards* *Alloy Welded Skirt Guard*

Non-Welded Alloy

Hip Strap Length: _____ Footplate Strap Length: _____

NB: All upholstery comes with leather reinforcing on top of back poles, grab bar cover, tension adjustable seat, 2" cushion, padded back, hip strap and footplate strap. We can also supply extra strapping and padding to suit your requirements at an extra cost.

WHEELS & PUSHRIMS

Wheel Size: **24"** **25"**


Number of sets required: _____

Wheel Bag:

NB: All wheels are Spinergy Sports Spokes (black). All sets come with tyres, tubes and quick release axles. If you are using your own wheels or wheels from another supplier we will need your wheels one week before we start fabricating your frame.

Pushrims:	Aluminium	Red Rubber	Black Rubber
Gap Between Pushrim:	STD (Onto Rim)	Outer Setting	
NB: Outer setting can only be selected without spoke guards.			
Spoke Guards:	Aluminium (Welded)	Polyethylene (black)	
	Polycarb (clear)		
Spoke Guard Position:	Flush with wheels	Flush with Pushrim	

FRAME DIMENSIONS

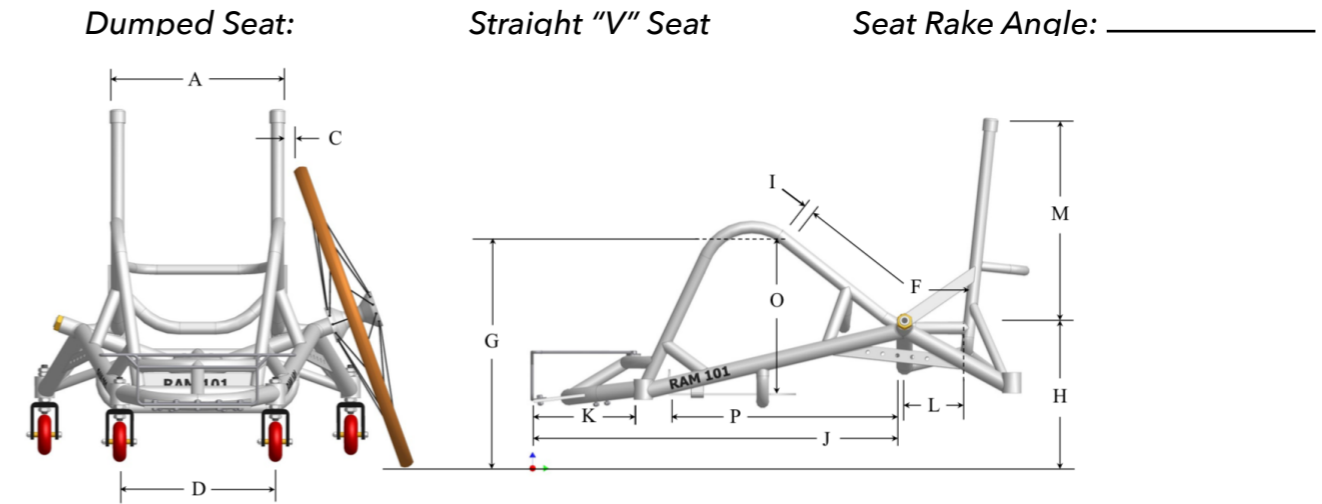

- A) Seat width: _____
- B) Camber: _____
- C) Distance between wheel and back pole: (usually 3/4") _____
- D) Front axle width: _____
- E) Wheel size: _____
- F) Sling length: _____
- G) Seat to ground, front: _____
- H) Seat to ground, rear: _____
- I) Extra in-front of sling: _____
- J) Frame length: (29 - 1/8" max on 24" wheels) _____
- K) Pick bar extension length: (20cm Length) _____
- L) Balance point: _____
- M) Back height: _____
- N) Back angle: _____
- O) Seat to foot rest: _____ Fixed Adjustable
- P) Horizontal foot position: (front of camber bar to inside toe-stop) _____

PICK BAR STYLE

1/2" Alloy Bolt-On Steel - 8mm (std) Bolt On Steel - 6.4mm

Pick Bar angle: _____

Standard (above 110mm line)

Inverted (below 110mm line)

To Height: (max height 200mm)

STD (200mm)

Custom: _____

Max Width:

To Width of: (only required if not to max width) _____

Please draw style required:

Front View:

Side View:

WING STYLE

Full (Attacker) Wing Straight

Short (Blocker) Wing Rounded

Standard: (Above 110mm Line) _____

Inverted: (Below 110mm Line) _____

To Height: (Max Height 200mm) _____

Please draw style required: (If not standard)

ANTI TIP GUARDS

Aluminium:

Polyethylene(Plastic)

Distance From Ground:

STD

Custom: _____

Please draw style required:

NOTES: